

PIN HEIGHT ADJUSTABLE TABLE INSTALLATION

March 22, 2002

P/N: 20432-01

TOOLS REQUIRED:

$\frac{3}{16}$ " Allen Wrench
Power Driver
#2 Phillips Head Bit
#3 Phillips Head Bit

5. Mount keyboard arm to monitor surface using (2) #12 x $1\frac{1}{8}$ " pan head screws on left side and (4) on right side, using power driver and #3 Phillips head bit. (See Figure 2).

PROCEDURE:

1. Extend monitor lifts fully by removing (2) pins, extending the monitors to their fullest extension and replacing the pins.

6. Insert Brake Release in right-hand slot. Secure with (2) #8 x $\frac{3}{4}$ " pan head screw. (See Figure 2).

2. Place worksurface upside down on clean area. Align base with predrilled holes on worksurface. (See Figure 1). Call Customer Service if hole patterns are needed.

7. If necessary form a loop with excess cable from keyboard brake release and secure with plastic cable retainer and (1) #8 x $\frac{3}{4}$ " pan head screw. (See Figure 2).

3. Attach base to worksurface using (6) #12 x $1\frac{1}{8}$ " pan head screws on each side. (See Figure 1).

FINAL ASSEMBLY:

8. Turn upright. Level worksurface by adjusting glides.

4. Attach feet using $\frac{5}{16}$ x $\frac{1}{2}$ " button head socket screw using front holes on each foot. (See Foot Detail Drawing).

If any problems are experienced, please call Baker Manufacturing Customer Service at 888-512-7036.

Single Surface – *Proceed to Final Assembly*

Dual Surface – *Continue with Step 5*



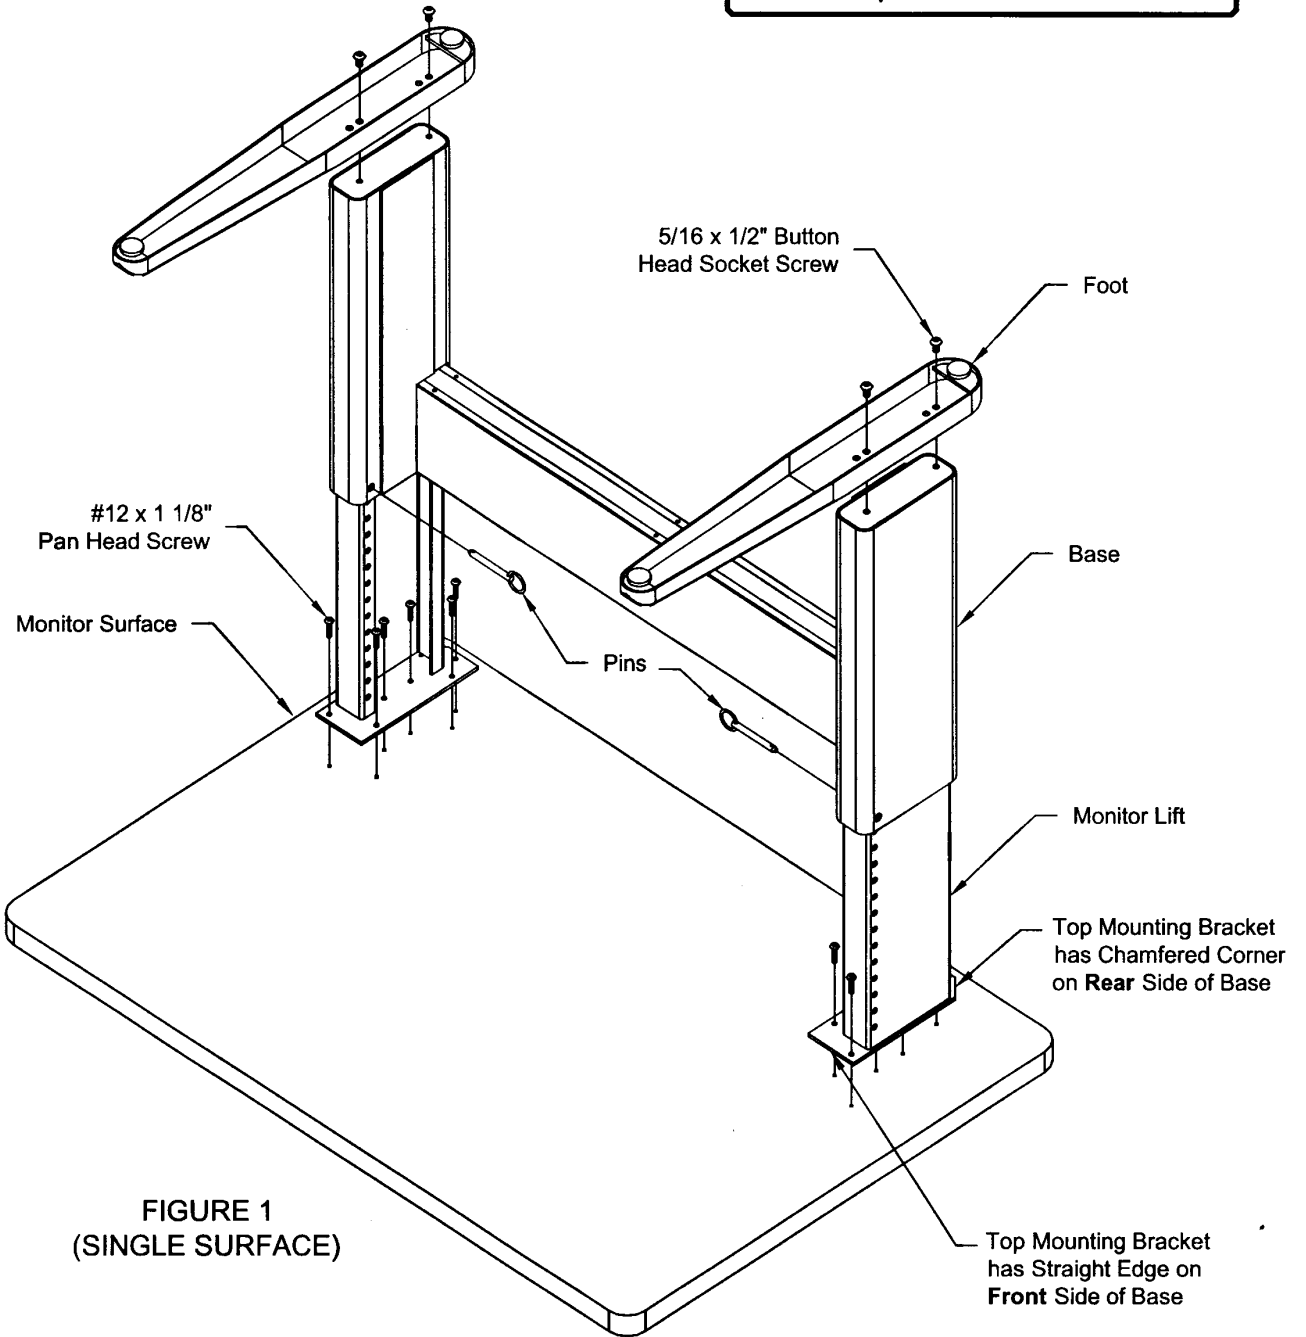
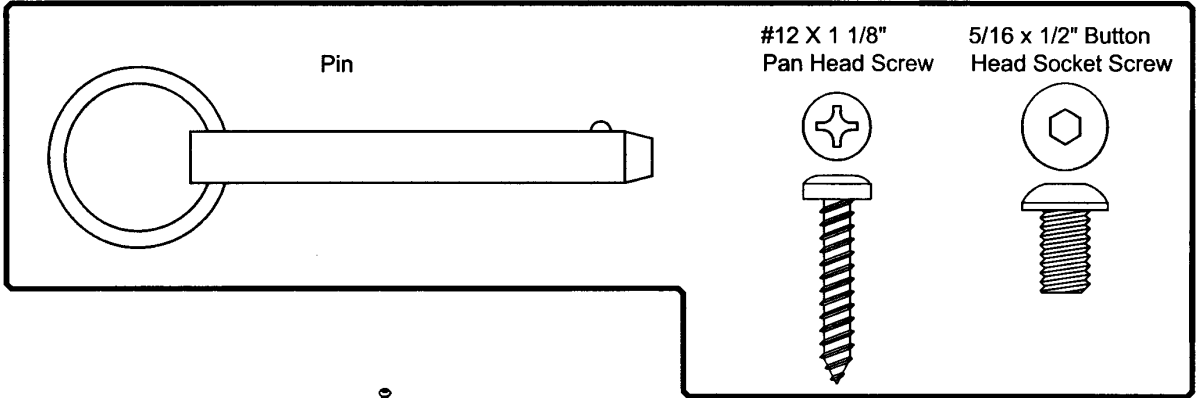


FIGURE 1
(SINGLE SURFACE)



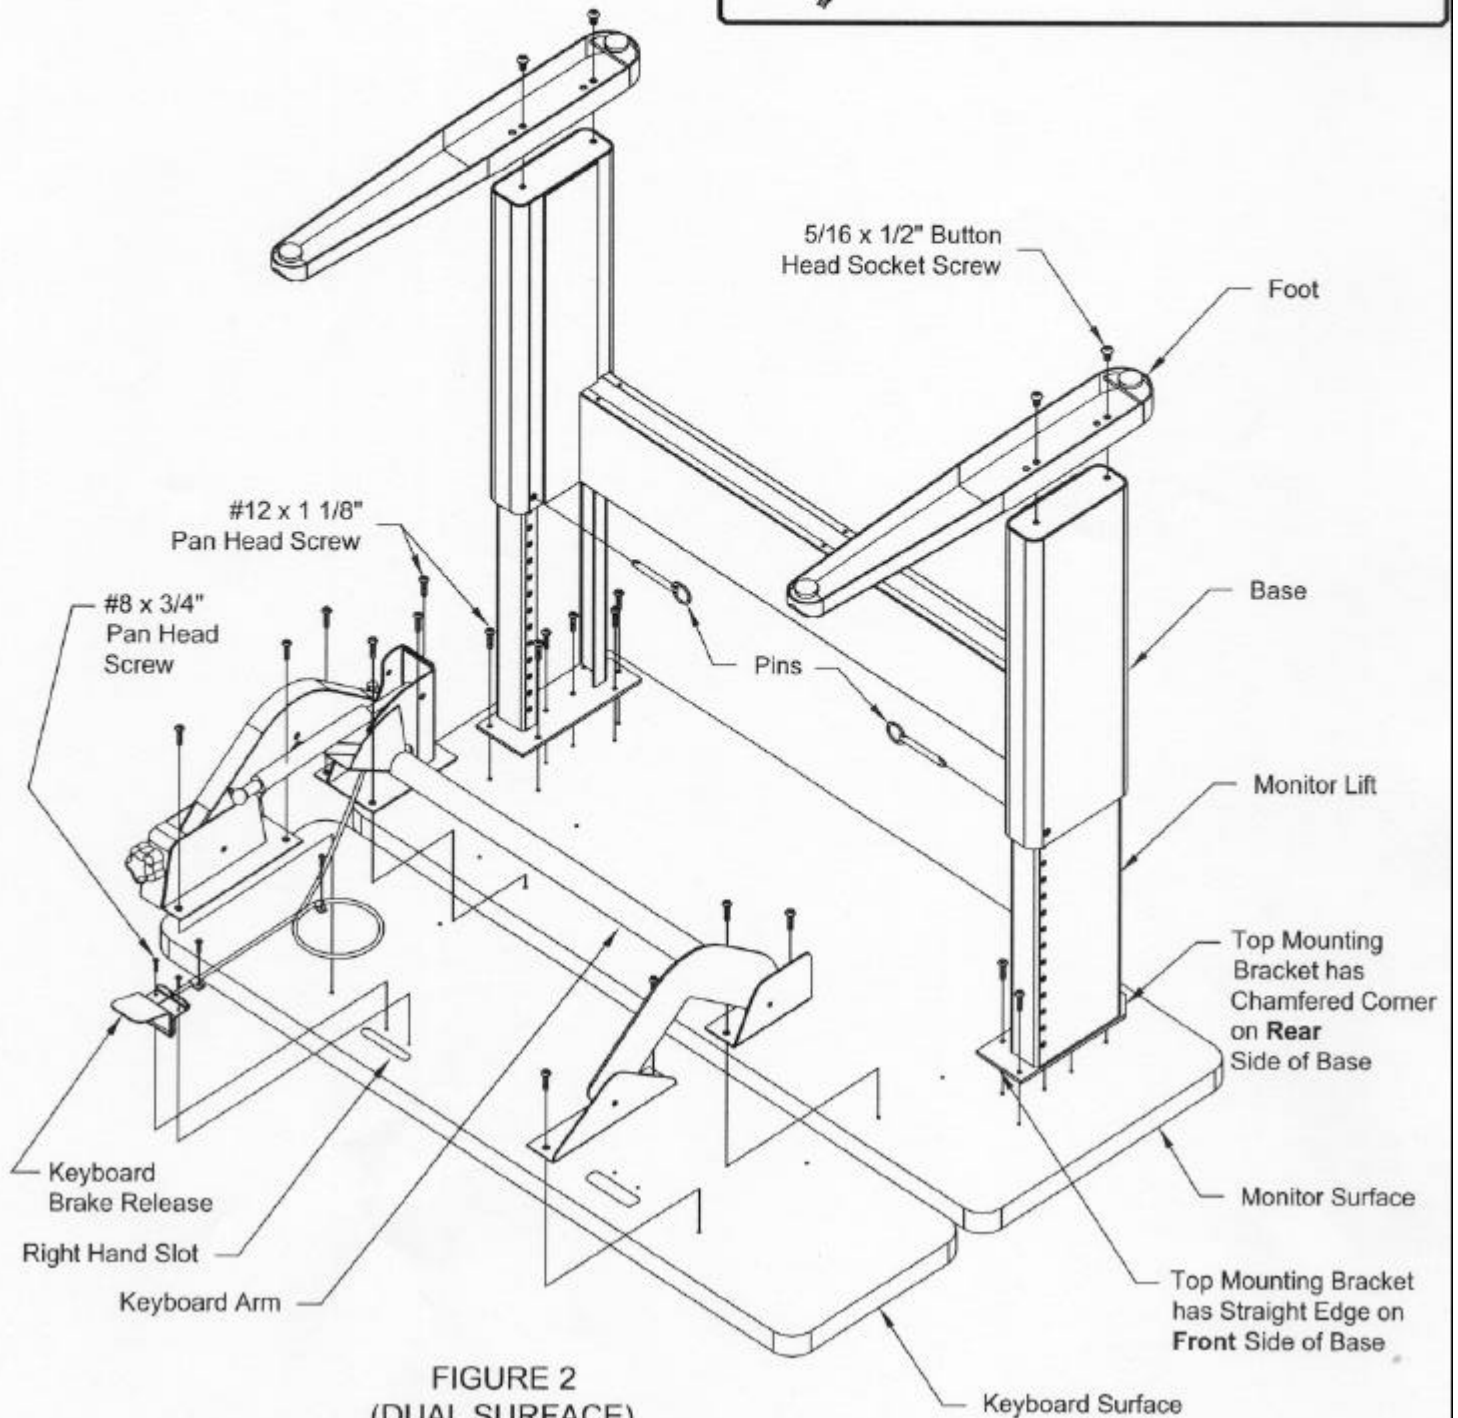


FIGURE 2
(DUAL SURFACE)

5/16 x 1/2" Button Head Socket Screw
(Use Rear Holes in Foot)

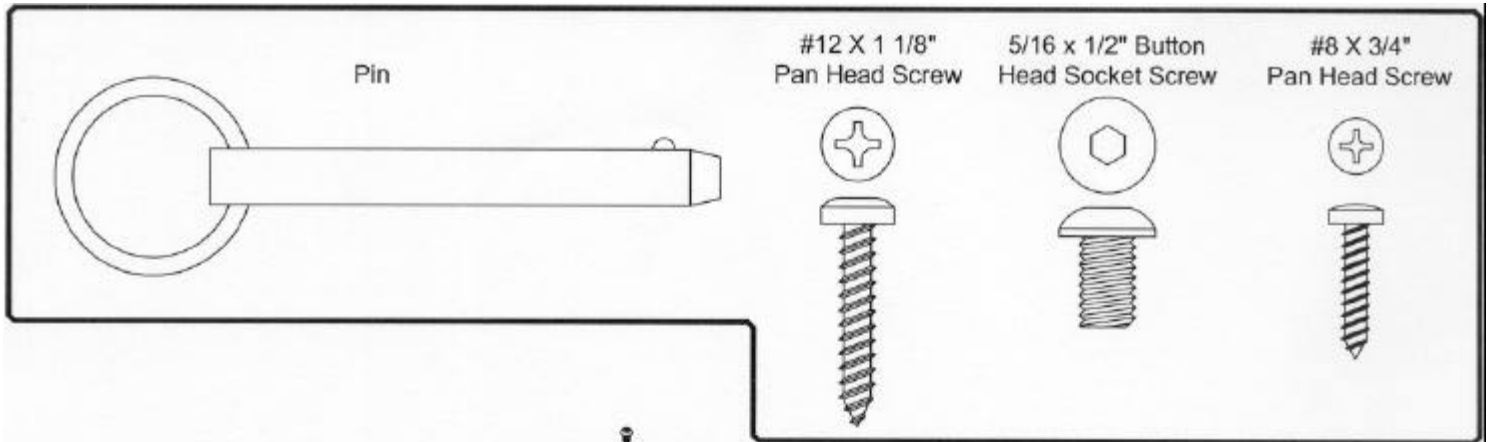

#8 x 3/4" Pan Head Screw

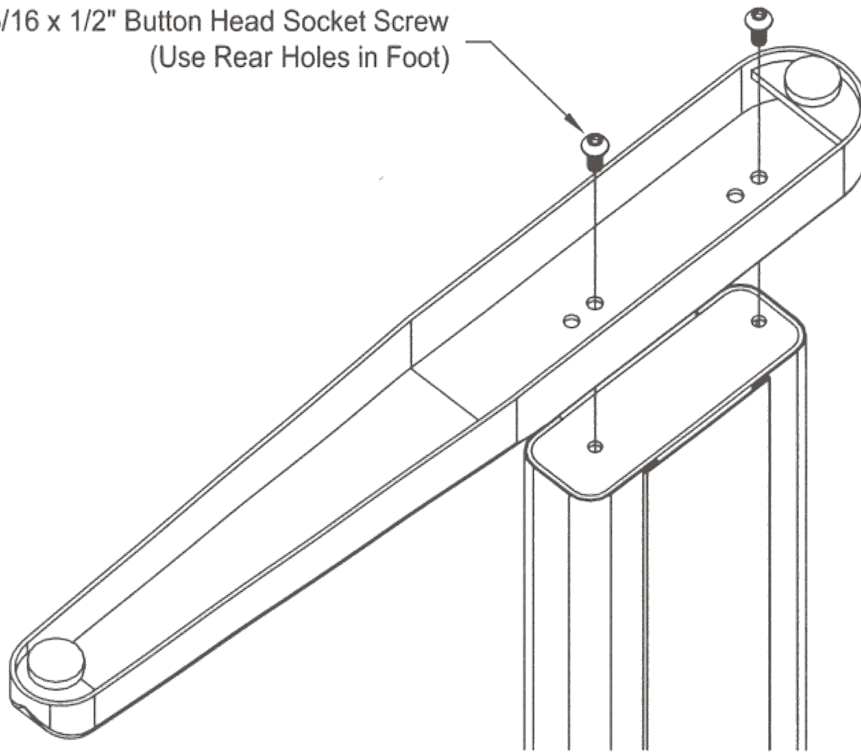